

IDC SCOKET

PITCH:2.54mm



SPECIFICATIONS

Material

Insulator : PBT glass reinforced, rated UL 94V-0

Contact : Phosphor Bronze or Brass

Electrical

Current Rating : 1Amp


Contact Resistance : 30 m ohms max.

Insulation Resistance : 3000 M ohms min.


Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40° ~ +105°

► Flat ribbon cable with 1.27mm pitch.

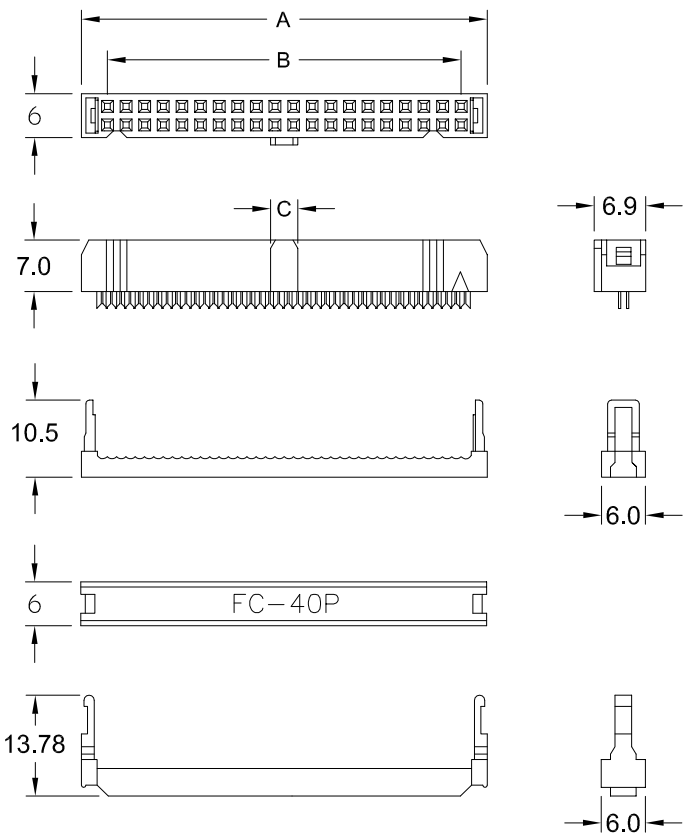

POSITION	A	B	C
6P	12.30	5.08	3.80
8P	14.84	7.62	1.80
10P	17.38	10.16	3.80
12P	19.92	12.70	3.80
14P	22.46	15.24	3.80
16P	25.00	17.78	3.80
18P	27.54	20.32	3.80
20P	30.08	22.86	3.80
24P	35.16	27.94	3.80
26P	37.70	30.48	3.80
30P	42.78	35.56	3.80
34P	47.86	40.64	3.80
36P	50.40	43.18	3.80
40P	55.48	48.26	3.80
50P	68.18	60.96	3.80
60P	80.88	73.66	3.80
64P	85.93	78.74	3.80

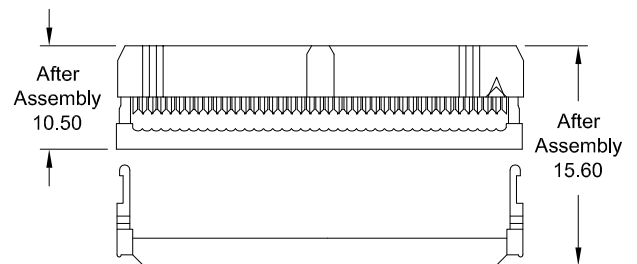

How to order

FC XX X X X XX

No. of contacts	Material	Special function	Color	Contact plating
06. 08. 10. 12. 14 16. 18. 20. 24. 26 30. 34. 36. 40. 50 60. 64	B: Brass P: Phosphor bronze	N: W/O RELIEF Y: W/N RELIEF	B: BLACK G: GREY	01: GOLD FLASH 03: 3u" 05: 5u" 10: 10u" 15: 15u" 30: 30u"

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X±0.35 .XX±0.25 ANG. ±3°

UNIT: mm

