

■ Features

- 0.39 Inch Four Digit Display
- Long lifetime operation
- IC compatible
- Low power dissipation

■ Applications

- Counting device
- Clock

■ Absolute Maximum Rating (Ta=25°C)

■ Photo



Item	Symbol	Value		Unit
		RA/R/YG/Y	B/G/W	
DC Forward Current	I _F	20	20	mA
Pulse Forward Current*	I _{FP}	100	100	mA
Reverse Voltage	V _R	5	5	V
Power Dissipation	P _t	44	66	mW
Operating Temperature	Topr	-30 ~ +70		°C
Storage Temperature	Tstg	-40 ~ +85		°C
Lead Soldering Temperature(1.6mm from seating plane)	Tsol	260°C/5sec		°C

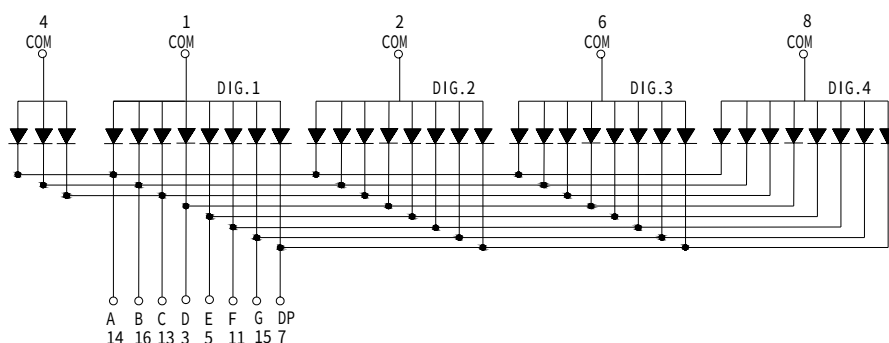
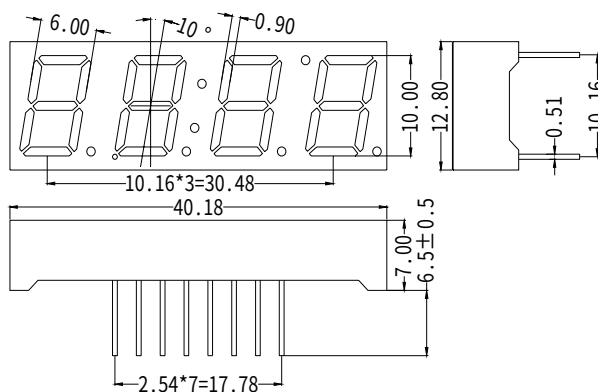
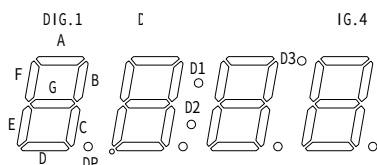
*Pulse width Max.10ms Duty ratio max 1/10

■ Electrical -Optical Characteristics (Ta=25°C)

Part Number	Color			V _F (V)			I _R (μA)	I _v (mcd)			λD(nm)		
				Min.	Typ.	Max.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.
				I _F =20mA			V _R =5V	I _F =20mA					
OSL40391-IW(LW)	White	W		-	3.3	3.5	20	-	65	-	X=0.27, Y=0.28		
OSL40391-IB(LB)	Blue	B		-	3.3	3.5	20	-	65	-	-	470	-
OSL40391-IG(LG)	Pure Green	G		-	3.3	3.5	20	-	189	-	-	525	-
OSL40391-IYG(LYG)	Yellow green	YG		-	2.2	2.4	20	-	12	-	-	571	-
OSL40391-IY(LY)	Yellow	Y		-	2.1	2.5	20	-	55	-	-	590	-
OSL40391-IR(LR)	Red	R		-	2.1	2.5	20	-	26	-	-	630	-
OSL40391-IRA(LRA)	high luminance Red	RA		-	2.1	2.5	20	-	100	-	-	625	-

*1 Tolerance of dominant wavelength is ±1nm

*2 Tolerance of luminous intensity is ±15%

■ Package dimensions and pin function
**OSL40391-IX
(Common Anode type)**


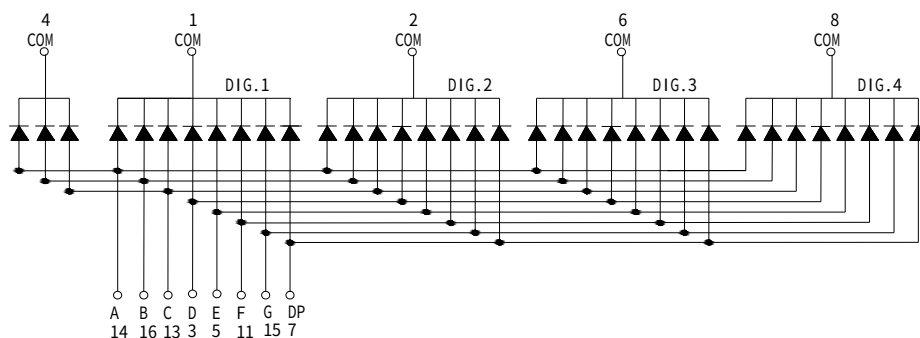
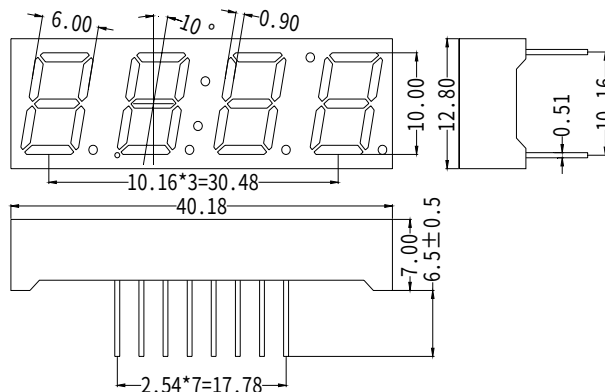
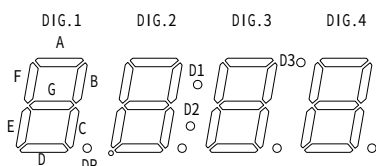
Note:

1, Unit : mm(Tolerance: ± 0.25 mm

unless otherwise noted)

2, The slope angle of any PIN

may be $\pm 5.0^\circ$ Max

**OSL40391-LX
(Common Cathode type)**


Note:

1, Unit : mm(Tolerance: ± 0.25 mm

unless otherwise noted)

2, The slope angle of any PIN

may be $\pm 5.0^\circ$ Max