

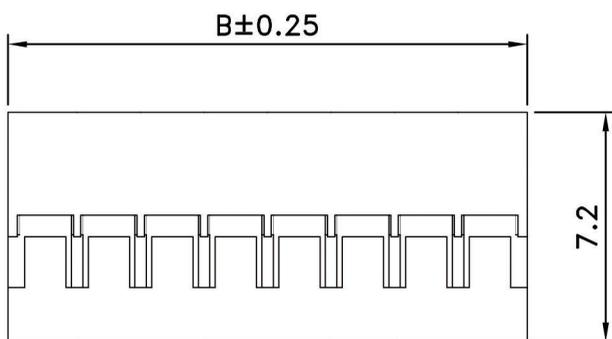
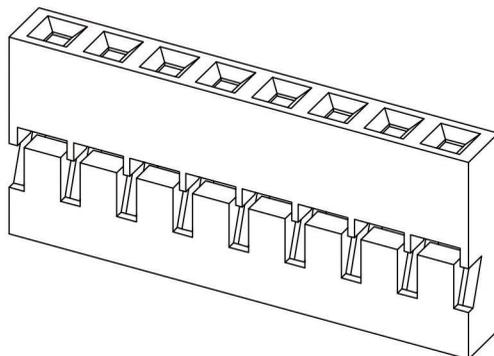


2mmピッチミニQIコネクタシリーズ

# QI2mm-xxx

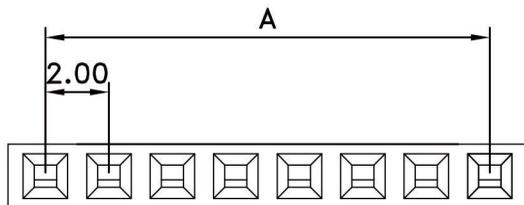

2031H-08

**FEATURES:**

MAT'L: NYLON 66 UL94V-2

CURRENT RATING: 1A AC,DC

VOLTAGE RATING: 250V AC,DC

MATES WITH: 2014 SERIES TERMINAL




UL FILE NO: E115256

**Dimensional Information**

Circuits	Part No.	Dim. A	Dim. B	Circuits	Part No.	Dim. A	Dim. B	Circuits	Part No.	Dim. A	Dim. B
2	2531H-02	2.00	4.0	15	2531H-15	28.00	30.0	28	2531H-28	54.00	56.0
3	2531H-03	4.00	6.0	16	2531H-16	30.00	32.0	29	2531H-29	56.00	58.0
4	2531H-04	6.00	8.0	17	2531H-17	32.00	34.0	30	2531H-30	58.00	60.0
5	2531H-05	8.00	10.0	18	2531H-18	34.00	36.0	31	2531H-31	60.00	62.0
6	2531H-06	10.00	12.0	19	2531H-19	36.00	38.0	32	2531H-32	62.00	64.0
7	2531H-07	12.00	14.0	20	2531H-20	38.00	40.0	33	2531H-33	64.00	66.0
8	2531H-08	14.00	16.0	21	2531H-21	40.00	42.0	34	2531H-34	66.00	68.0
9	2531H-09	16.00	18.0	22	2531H-22	42.00	44.0	35	2531H-35	68.00	70.0
10	2531H-10	18.00	20.0	23	2531H-23	44.00	46.0	36	2531H-36	70.00	72.0
11	2531H-11	20.00	22.0	24	2531H-24	46.00	48.0	37	2531H-37	72.00	74.0
12	2531H-12	22.00	24.0	25	2531H-25	48.00	50.0	38	2531H-38	74.00	76.0
13	2531H-13	24.00	26.0	26	2531H-26	50.00	52.0	39	2531H-39	76.00	78.0
14	2531H-14	26.00	28.0	27	2531H-27	52.00	54.0	40	2531H-40	78.00	80.0

2列2mmピッチミニQIコネクタシリーズ

# QII2mm-xxx

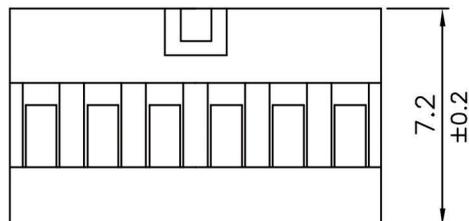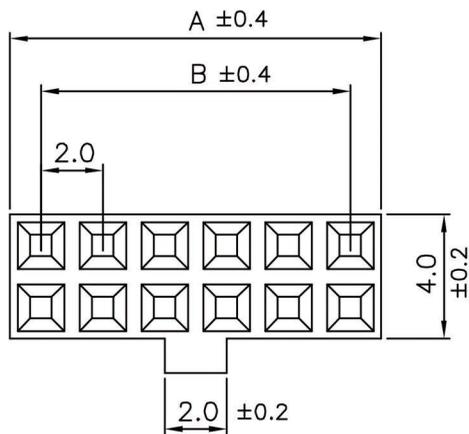


PART NO.	A	B	PART NO.	A	B
2032-2x2	4.4	2.0	2032-2x14	28.4	26.0
2032-2x3	6.4	4.0	2032-2x15	30.4	28.0
2032-2x4	8.4	6.0	2032-2x16	32.4	30.0
2032-2x5	10.4	8.0	2032-2x17	34.4	32.0
2032-2x6	12.4	10.0	2032-2x18	36.4	34.0
2032-2x7	14.4	12.0	2032-2x19	38.4	36.0
2032-2x8	16.4	14.0	2032-2x20	40.4	38.0
2032-2x9	18.4	16.0	2032-2x21	42.4	40.0
2032-2x10	20.4	18.0	2032-2x22	44.4	42.0
2032-2x11	22.4	20.0	2032-2x23	46.4	44.0
2032-2x12	24.4	22.0	2032-2x24	48.4	46.0
2032-2x13	26.4	24.0	2032-2x25	50.4	48.0

- \* MAT'L: NYLON 66 UL94V-2
- \* CURRENT RATING: 1A AC,DC
- \* VOLTAGE RATING: 250V AC,DC
- \* MATES WITH: 2014 SERIES TERMINAL
- \* UL FILE NO: E115256
- \* CSA FILE NO: LR84767

2mmピッチミニQI/QIIコネクタ用コンタクトピン

# QI2mm-ZU

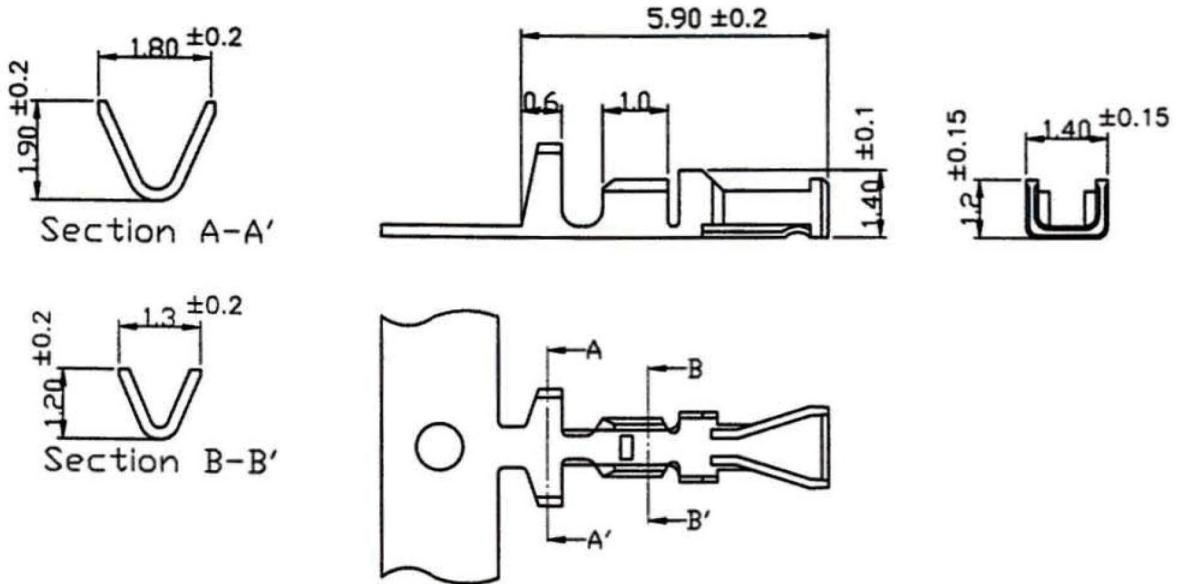

THICKNESS:0.2mm

MAT'L: PHOSPHOR BRONZE WITH TIN NICKEL,LEAD OR GOLD PLATING

CURRENT RATING: 1A AC,DC

VOLTAGE RATING: 250V AC,DC

APPLICABLE WIRE RANGE: AWG #26-28

MATES WITH: 2031H & 2032H SERIES HOUSING

ACCEPTS WITH: 2001PS, 2002PS, 2003PR, 2004PR SERIES WAFER

UL NO.:E115256

CSA NO.:LR84767