


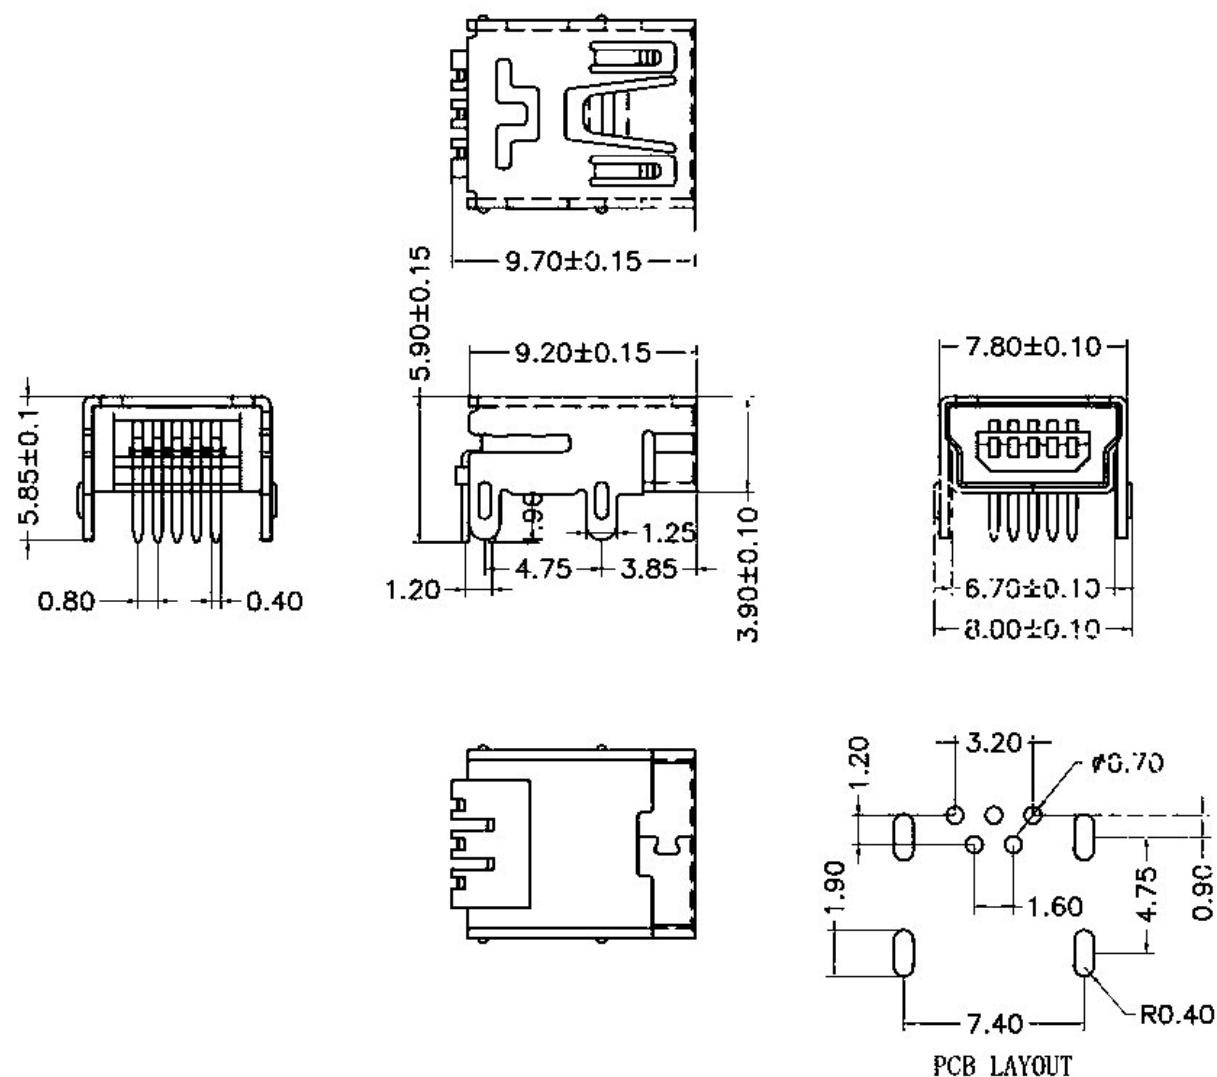

USB-32BJ-N

特性:Specifications:

电器:Electrical:

接触阻抗:Contact Resistance

50 milliohms MAX

耐电压:Dielectric Withstanding Voltage:

100V AC AT Sea Level

绝缘阻抗:Insulation Resistance:

100 MEGA ohms MIN

材料:Material:

塑胶:Housing:Hing Temperature Thermoplastics,
LCP 耐高温塑胶

端子:Contact: Copper Alloy 铜合金

铜壳:Shell: Copper Alloy 铜合金

电镀:Finish:

端子:Contact: Plated Gold in Mating Area;

Tin On Solder Tails

接触点镀金. 脚镀锡

铜壳:Shell:

Nickel/ Plating 镀镍